





Nature at your feet

#### **Amorim Revestimentos**

Rua do Ribeirinho 202 P. O. Box 13 4536-907 S. Paio de Oleiros PORTUGAL

p\_ (+351) 227 475 600 e\_ wicanders.ar@amorim.com www.wicanders.com

# **Enabling wellbeing** in every room








#### Nature at your feet

Wicanders has a legacy that goes back to 1868 and is the global leading brand in flooring products with cork technology. Present in more than 70 countries, its promise is to provide Floors for Living, ready for real life, for our home and office, for our different rhythms, for our family and pets, for all those wonderful and simple, yet sometimes unexpected moments. Floors for our lives.


Over the years, Wicanders has developed sustainable floor and wall coverings with exclusive properties due to its innovative Corktech technology. By combining state of the art technology with the exclusive natural properties of cork, a higher standard in flooring is achieved. Available with cork, wood and stone looks, its products are able to provide a silent and thermally insulated environment, that endures impacts and is very comfortable to walk and stand on.

Wicanders means wellbeing, a choice for life!



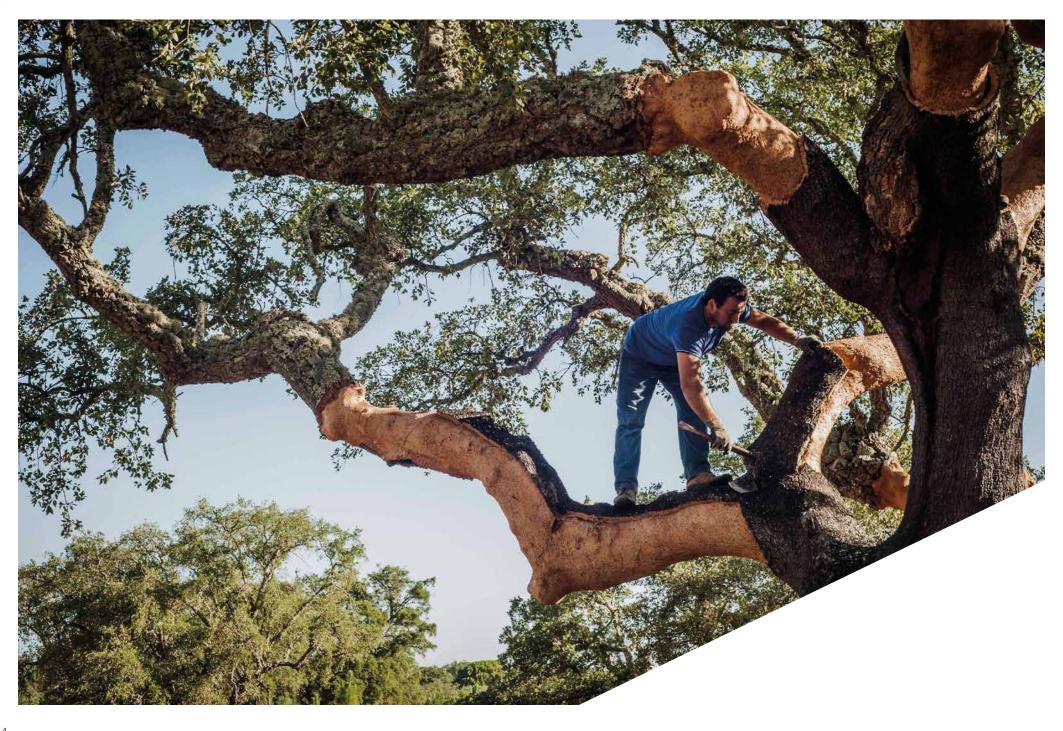



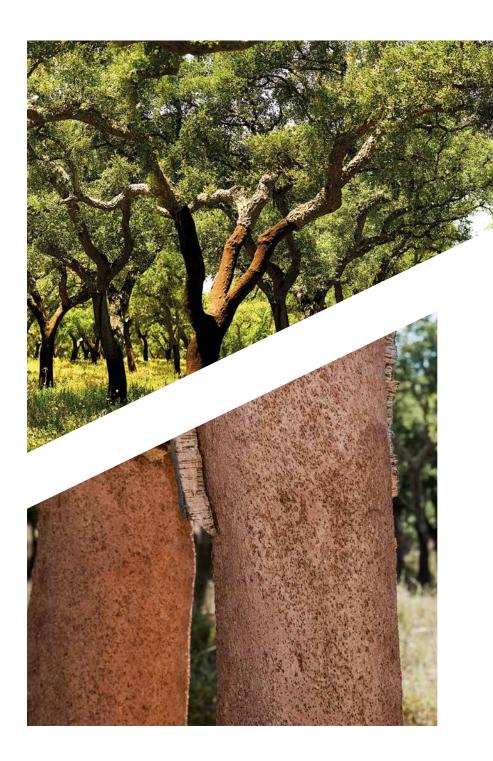



### FROM NATURE, TO YOUR SPECIAL SPACE.

Technology only makes sense if it improves people's lives. This concept finds expression in products developed with Corktech technology.

By using a unique engineered multilayer structure, which combines state of the art technology with the exclusive natural properties of cork, a higher standard in flooring is achieved, providing the perfect match between design and wellbeing.

Wicanders uniqueness is daily achieved by continuously research on how end customers think and live their spaces. Wicanders brings to the market products that provide a silent and thermally insulated environment, that endures through time and are sustainable at the same time.



Silence



Natural Thermal Insulation



Walking Comfort







## cork Essence | Resist<sup>+</sup> 17

cork Pure 49

# cork

## Essence Resist<sup>+</sup>

#### **Formats**

605 x 445 x 10,5mm 23 13/16 x 17 1/2 x 3/8"

905 x 295 x 10,5mm 35 5/8 x 11 5/8 x 3/8"

1220 x 140 x 10,5mm 48 x 5 1/2 x 3/8"









Heavy Traffic Residential areas




Moderate Traffic Commercial areas



S Budget products



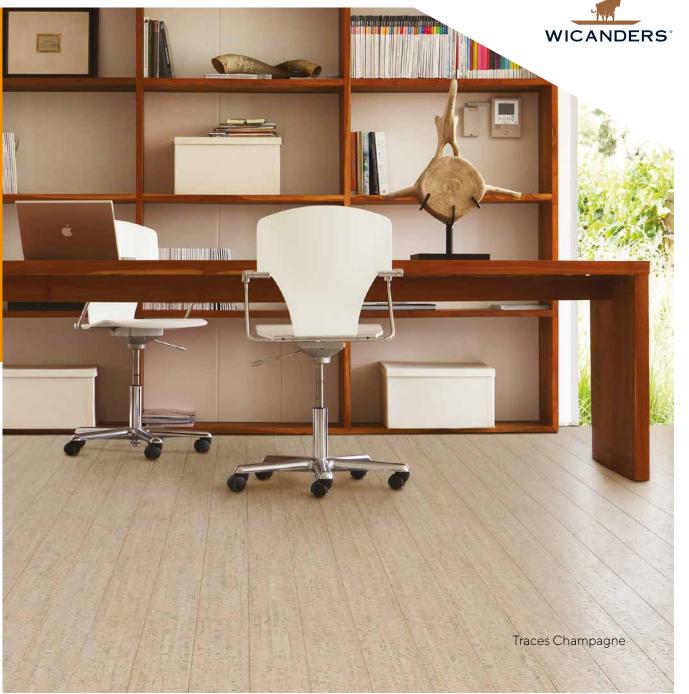



Flock Champagne

C81YOO1 1220 x 140 x 10,5mm Essence C11Y001 1220 x 140 x 10,5mm Resist<sup>+</sup>



Flock Tea

C83Z001 1220 x 140 x 10,5mm Essence C13Z001 1220 x 140 x 10,5mm Resist<sup>+</sup>



Flock Chestnut

C84A001 1220 x 140 x 10,5mm Essence C14A001 1220 x 140 x 10,5mm Resist\*



#### Class

## When nature meets charm

In modern interior design, the creation of spaces with style and personality starts with beautiful and expressive floors. Aligned with the market trends, our team of experts has created an unique Class collection that combines different shapes of natural Cork.

Rich in style, charm and sophistication, and in harmony with nature, Class also provides an unmatched wellbeing that will for sure be very pleasant when getting together with family and friends.

Light coloured flooring like Flock Moonlight is the splendid background for soft colours and it will balance smoothly your classic and modern furniture with a minimalistic look.










Flock Moonlight



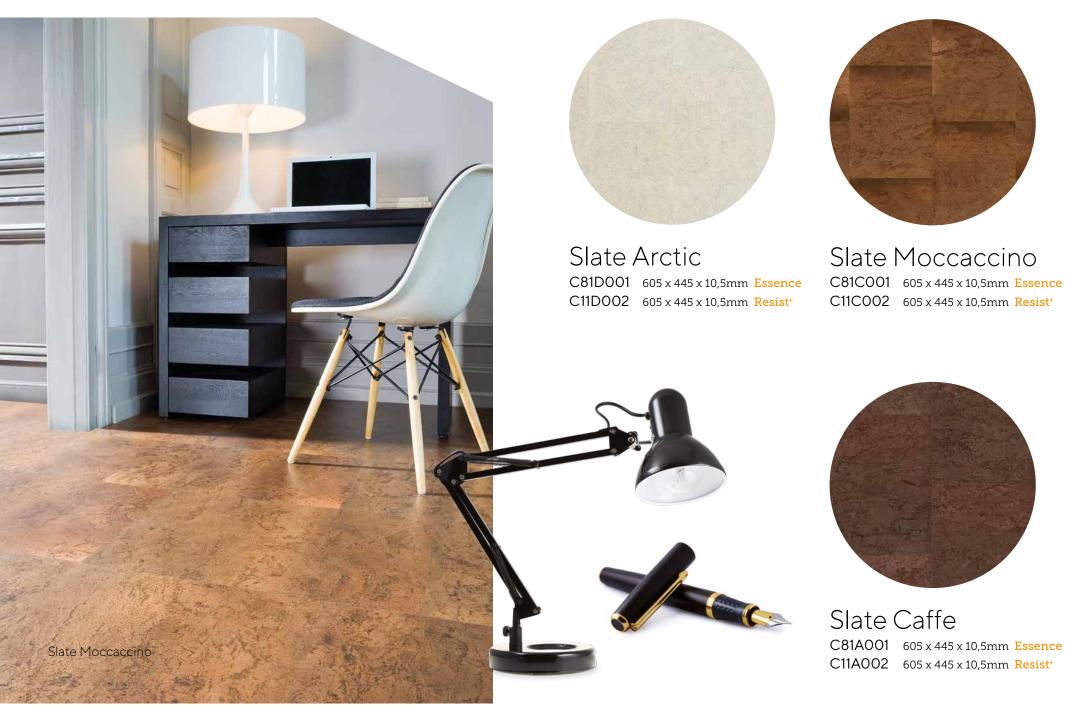



President Spice F808002 1220 x 140 x 10,5mm Essence C14K001 1220 x 140 x 10,5mm Resist<sup>+</sup>



President Chestnut
F832003 1220 x 140 x 10,5mm Essence
C14L001 1220 x 140 x 10,5mm Resist\*





President Chocolate F831002 1220 x 140 x 10,5mm Essence C141001 1220 x 140 x 10,5mm Resist\*





Identity Moonlight
1801002 905 x 295 x 10,5mm Essence
C12N002 905 x 295 x 10,5mm Resist\*



Identity Champagne
1805002 905 x 295 x 10,5mm Essence
C120001 905 x 295 x 10,5mm Resist\*



Identity Timide
1802002 905 x 295 x 10,5mm Essence
C12M001 905 x 295 x 10,5mm Resist<sup>+</sup>







Identity Eden

1806002 905 x 295 x 10,5mm Essence

C12P001 905 x 295 x 10,5mm Resist\*



Identity Silver
1803002 905 x 295 x 10,5mm Essence
C12Y002 905 x 295 x 10,5mm Resist<sup>+</sup>



Identity Tea

1810002 905 x 295 x 10,5mm Essence
C12R001 905 x 295 x 10,5mm Resist\*





Identity Chestnut

1832002 905 x 295 x 10,5mm Essence C13G001 905 x 295 x 10,5mm Resist\*



BROWNS OF CHESTER

## Identity Nightshade

1821002 905 x 295 x 10,5mm Essence C12L001 905 x 295 x 10,5mm Resist<sup>+</sup>




Originals Natural

O801007 905 x 295 x 10,5mm Essence C111001 905 x 295 x 10,5mm Resist\*



Originals Rhapsody

O825005 905 x 295 x 10,5mm Essence C125001 905 x 295 x 10,5mm Resist\*

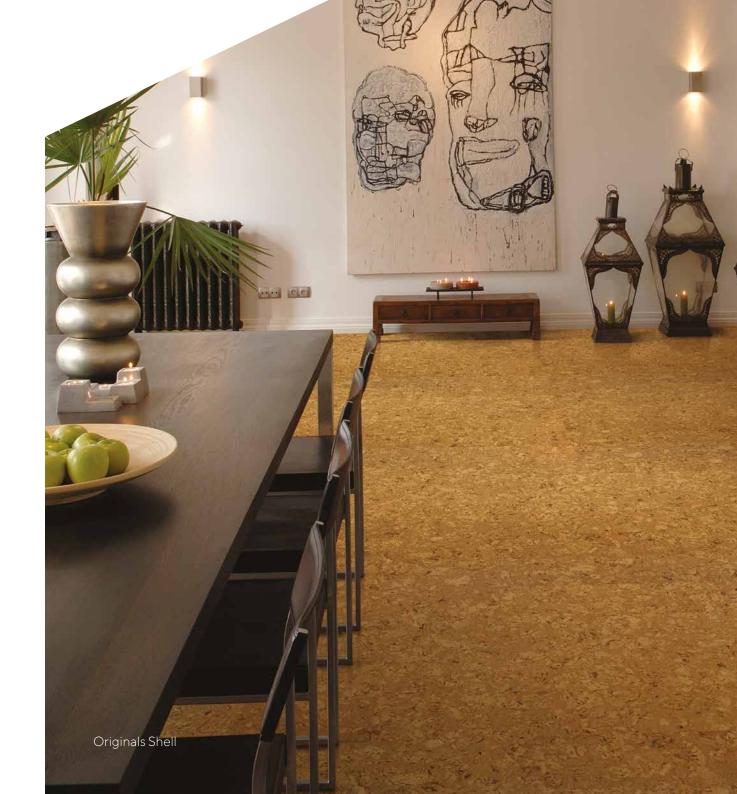





Originals Country
0832004 905 x 295 x 10,5mm Essence

C132001 905 x 295 x 10,5mm Resist<sup>+</sup>



Originals Shell
0824003 905 x 295 x 10,5mm Essence

C124001 905 x 295 x 10,5mm Resist<sup>+</sup>







Originals Dawn O849003 905 x 295 x 10,5mm Essence C149001 905 x 295 x 10,5mm Resist+

Originals Accent O841002 905 x 295 x 10,5mm Essence C141001 905 x 295 x 10,5mm Resist<sup>+</sup>





Originals Character O822002 905 x 295 x 10,5mm Essence C122001 905 x 295 x 10,5mm Resist+



Originals Harmony O821005 905 x 295 x 10,5mm Essence C121001 905 x 295 x 10.5mm Resist+



Originals Symphony O830003 905 x 295 x 10,5mm Essence C130001 905 x 295 x 10.5mm Resist\*









Personality Moonlight
P801002 905 x 295 x 10,5mm Essence
C14H001 905 x 295 x 10,5mm Resist\*





Personality Timide
P802002 905 x 295 x 10,5mm Essence
C13J001 905 x 295 x 10,5mm Resist\*



Personality Champagne
P805002 905 x 295 x 10,5mm Essence
C13K001 905 x 295 x 10,5mm Resist\*



## Personality Eden

P806002 905 x 295 x 10,5mm Essence C15S001 905 x 295 x 10,5mm Resist\*









Personality Spice
P808002 905 x 295 x 10,5mm Essence
C15U001 905 x 295 x 10,5mm Resist+



Personality Tea
P810002 905 x 295 x 10,5mm Essence
C15T001 905 x 295 x 10,5mm Resist<sup>+</sup>



Personality Chestnut
P832002 905 x 295 x 10,5mm Essence
C14X001 905 x 295 x 10,5mm Resist\*



Fashionable Cement

C85L001 905 x 295 x 10,5mm Essence C15L001 905 x 295 x 10,5mm Resist<sup>+</sup>



Fashionable Grafite

C85M001 905 x 295 x 10,5mm Essence C15M001 905 x 295 x 10,5mm Resist\*



Fashionable Macchiato

C85NO01 905 x 295 x 10,5mm Essence C15NO01 905 x 295 x 10,5mm Resist\*



Fashionable Mystic

C85KOO1 905 x 295 x 10,5mm Essence C15KOO1 905 x 295 x 10,5mm Resist\*

### **Contemporary**

## Reinvented cork looks for sophisticated atmospheres

Contemporary homes are by definition visually light and functional. The "less is more" rule applies and all decor elements are carefully chosen.

When on a new project or remodeling an existing space, flooring takes place as one of the first decisions to be made. The style and type of benefits it can provide are highly considered during the decision process, in order to achieve the desired authenticity and functionality.

Fashionable Glacier has, for instance, a reinvented cork pattern veneer which results in an excellent option when creating a decor for a home open space. The neutral colour palettes will enable calm and relaxing atmospheres.







Lane Timide

C83R001 1220 x 140 x 10,5mm Essence C13R001 1220 x 140 x 10,5mm Resist<sup>+</sup>



Lane Chestnut

C83S001 1220 x 140 x 10,5mm Essence C13S001 1220 x 140 x 10,5mm Resist\*





Linn Blush

C81O001 605 x 445 x 10,5mm Essence C11O003 605 x 445 x 10,5mm Resist<sup>+</sup>



Linn Moon

C81NOO1 605 x 445 x 10,5mm Essence C11NOO1 605 x 445 x 10,5mm Resist<sup>+</sup>



Linn Cioccolato

C81L001 605 x 445 x 10,5mm Essence C11L002 605 x 445 x 10,5mm Resist<sup>+</sup>














Traces Moonlight
C85P001 1220 x 140 x 10,5mm Essence
C15P001 1220 x 140 x 10,5mm Resist\*




Traces Champagne
C850001 1220 x 140 x 10,5mm Essence
C150001 1220 x 140 x 10,5mm Resist\*



Traces Spice
Q808003 1220 x 140 x 10,5mm Essence
C14N001 1220 x 140 x 10,5mm Resist\*



Traces Tea
Q810001 1220 x 140 x 10,5mm Essence
C14M001 1220 x 140 x 10,5mm Resist\*

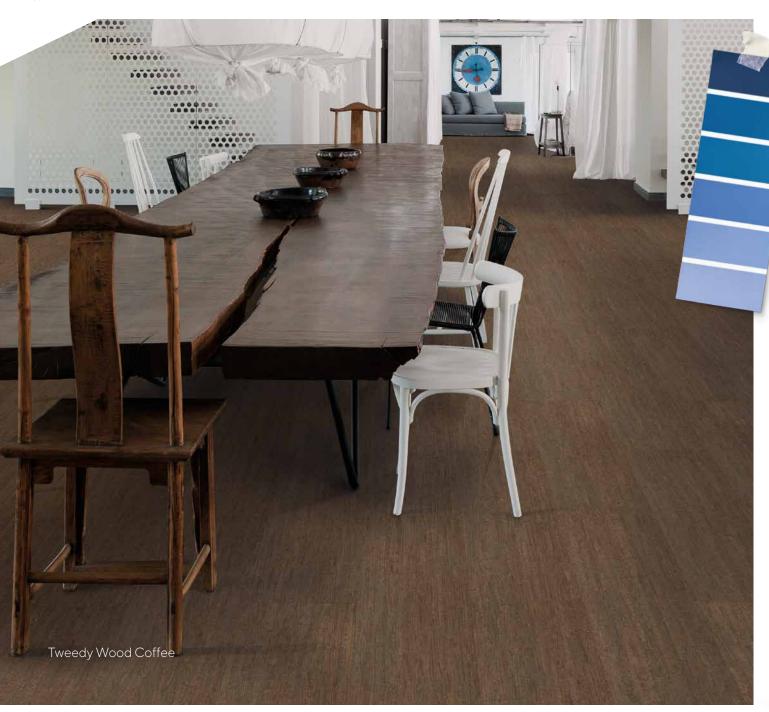



Tweedy Wood Coffee C861001 Essence

905 x 295 x 10,5mm









Tweedy Wood Timide C86H001 Essence



Tweedy Wood Cocoa C86F001 Essence



Tweedy Saw Cut Moon C86D001 Essence


905 x 295 x 10,5mm



Reed Meridian
C83T001 1220 x 140 x 10,5mm Essence
C13T001 1220 x 140 x 10,5mm Resist<sup>+</sup>



Reed Barley
C83U001 1220 x 140 x 10,5mm Essence
C13U001 1220 x 140 x 10,5mm Resist\*

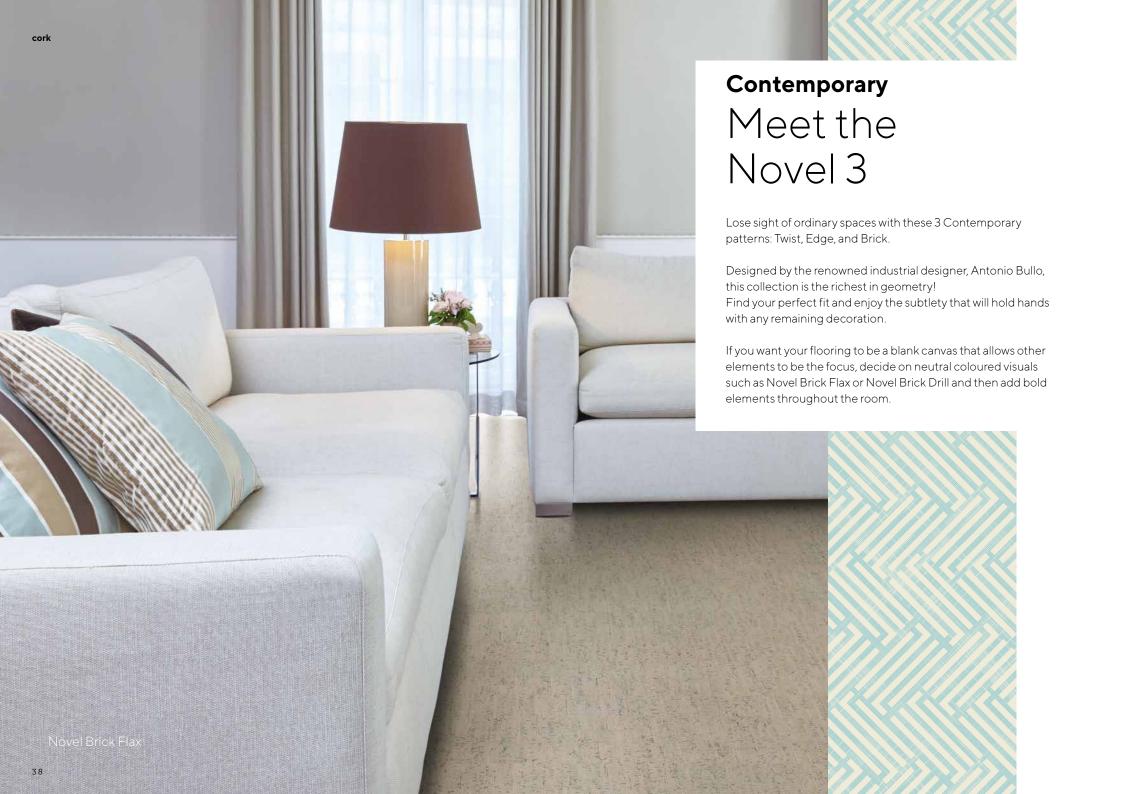



"Nature and geometry.

Cork, distinctive and unmistakable material, clearly shows its own characteristics.

An innovative production process guides its natural irregularities on the geometry of contemporary architecture. "



### Antonio Bullo

Renowned industrial Designer based in Venice

Won four Gold Medals at the Faenza International Ceramic Competition

Won two Design Plus Awards at ISH Frankfurt









Novel Twist Natural C8G0001 905 x 295 x 10,5mm Essence C1G0001 905 x 295 x 10,5mm Resist\*



Novel Twist Velvet
C86Q001 905 x 295 x 10,5mm Essence
C16Q001 905 x 295 x 10,5mm Resist+



Novel Twist Drill
C86P001 905 x 295 x 10,5mm Essence
C16P001 905 x 295 x 10,5mm Resist+



Novel Twist Taffeta

C860001 905 x 295 x 10,5mm Essence
C160001 905 x 295 x 10.5mm Resist\*



Novel Edge Natural
C8G2001 905 x 295 x 10,5mm Essence
C1G2001 905 x 295 x 10,5mm Resist\*



Novel Edge Lace
C86W001 905 x 295 x 10,5mm Essence
C16W001 905 x 295 x 10,5mm Resist\*



Novel Edge Drill
C86V001 905 x 295 x 10,5mm Essence
C16V001 905 x 295 x 10,5mm Resist\*



Novel Edge Burlap C86U001 905 x 295 x 10,5mm Essence C16U001 905 x 295 x 10,5mm Resist\*

#### Essence

# Technical solution


PROTECTIVE SURFACE

GENUINE CORK VENEER

AGGLOMERATED CORK 3,2MM

HDF - HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

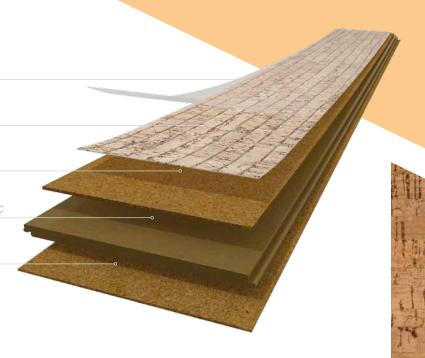

# Finishing & Warranty



Xtreme WRT surface finish (Wear Resistance Technology) is the right choice to fit the most demanding needs of domestic areas. This environmental friendly varnish is based on a ceramic compound which ensures exceptional strength and longevity.













#### Resist<sup>+</sup>

# Technical solution

PROTECTIVE WEAR LAYER

GENUINE CORK VENEER

AGGLOMERATED CORK 2,7MM

HDF - HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM



## Finishing & Warranty



HPS surface finish (High Performance Surface) has been specially developed for areas with heavy traffic, such as commercial, business or general public areas.

This high performance surface has an extra hard wearing surface combined with Nano-Beads Technology, where extremely tiny beads are embedded in a top layer for improved properties such as scratch, slip, scuff and stain resistance.









### Essence

# Technical Data Sheet

Floating					
			WRT 905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8" 605 x 445 x 10,5mm   23 13/16 x 17 1/2 x 3/8" 1220 x 140 x 10,5mm   48 x 5 1/2 x 3/8"		
Level of use Domestic	ISO 10874	Class	23		
Level of use Commercial	ISO 10874	Class	31		
Finish Description	-	-	UV-cured Acrylic varnish with ceramic beads		
	Standard-Test Method	Unit	Specification		
General Properties - EN 14085 + EN 12104 + EN 655					
Dimensions: Width Length	EN ISO 24346	mm	± 0,10% up to max. 0,5 max. 2,0		
Overall thickness	EN ISO 24346	mm	±0,25		
Squareness	EN ISO 24342	mm	≤ 0,50		
Straightness measured at the surface layer	EN ISO 24342	mm	≤ 0,30		
Flatness of the panel (Length - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0		
Flatness of the panel (Width - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,10 / ≤ 0,15		
Openings between panels	EN 14085 (Annex B)	mm	≤0,20		
Height difference between panels	EN 14085 (Annex B)	mm	≤0,20		
Dimensional stability (humidity)	EN 669 (Annex C)	%	≤5		
Mass per unit area	ISO 23997	g/m²	Nominal Value (8000) -10%; +13%		
Classification Properties - EN 14085 + EN 12104 + EN 655					
Nominal thickness for cork surface	EN ISO 24340	mm	≥3,0		
Castor chair	EN 425	Visual effect after 25 000 cycles	No disturbance to the surface other than slight change in appearance and no delamination shall occur		
Simulated movement of a furniture leg	EN 424	Visual effect	No damage shall be visible after testing with a type 2 foot		
Residual indentation	EN ISO 24343-1	mm	≤ 0,40		



Floating				
			WRT 905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8" 605 x 445 x 10,5mm   23 13/16 x 17 1/2 x 3/8" 1220 x 140 x 10,5mm   48 x 5 1/2 x 3/8"	
Safety properties - EN 14041				
Fire resistance	EN 13501-1	Class	C <sub>fl-s1</sub>	
Slip classification	EN 13893	Class	DS	
Formaldehyde emission	EN 717-1	Class	E1	
Electrical behaviour	EN 1815	KV	Not Antistatic	
Content pentachlorophenol (PCP)	EN 14041 (Annex B)	mg/Kg	PCP Free	
Optional properties				
Stains resistance	ISO 26987(a)	Grade (b)	Grade 5 (NaOH Grade 4)	
Thermal resistance	EN 12667	(m²K)/W	R≤ 0,150	
Impact sound reduction	ISO 140-8	dB ( $\Delta$ Lw)	16	
Reduction improvement	EDIT/ILID Works Chandard 421	dB(A)	13.2	
Difference of loudness	EPH/IHD Works Standard 431	%	51.6	
ASTM Standards				
IIC Impact insulation class	ASTM E492 /ASTM E989	IIC (dB)	58	
STC Classification for rating sound insulation	ASTM E90 /ASTM E413	STC (dB)	54	
Ignition characteristics of finished textile floor covering systems	ASTM D2859		met the criteria	
Optical density of smoke	ASTM662	DS(4,0min)	23,7	
		DS(4,0min)	32,3	
Critical radiant flux	ASTM E648	(W / cm²)	0,38	
Residual indentation	ASTM F1914	(%)	0,2	
Thermal conductivity		W/(m.K)	0,108	
ASTM C 177	ASTM C 177			

(m<sup>2</sup>K)/W

Thermal resistance

0,0999



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.



- (a) The following products were tested; acetone, coffee, NaOH,  $H_2O_2$ , shoe polish.
- (b) Grade 5 no visible change / Grade 4 very minor changes / damages at the surface / Grade 3 minor changes / damages at the surface / Grade 2 Strong changes / damages at the surface / Grade 1 Surface destruction.

Wicanders Flooring Collection is supported by a warranty. Please, read the warranty terms on **www.wicanders.com** 

#### Resist<sup>+</sup>

# Technical Data Sheet

		Floating	
			HPS 605 x 445 x 10,5mm   23 13/16 x 17 1/2 x 3/8" 905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8" 1220 x 140 x 10,5mm   48 x 5 1/2 x 3/8"
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33 <b>†#</b> †
Finish Description	-	-	UV-cured Acrylic varnish with nano particles
	Standard-Test Method	Unit	Specification
General Properties - EN 14085 + EN 12104 + EN 6	55		
Dimensions: Width Length	EN ISO 24346	mm	± 0,10% up to max. 0,5 max. 2,0
Overall thickness	EN ISO 24346	mm	± 0,25
Squareness	EN ISO 24342	mm	≤ 0,50
Straightness measured at the surface layer	EN ISO 24342	mm	≤ 0,30
Flatness of the panel (Length - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0
Flatness of the panel (Width - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,10 / ≤ 0,15
Openings between panels	EN 14085 (Annex B)	mm	≤ 0,20
Height difference between panels	EN 14085 (Annex B)	mm	≤ 0,20
Dimensional stability (humidity)	EN 669 (Annex C)	%	≤5
Mass per unit area	ISO 23997	g/m²	Nominal Value (8500) -10%; +13%
Classification Properties - EN 14085 + EN 12104 +	EN 655		
Thickness of wear layer (Wear group T)	EN ISO 24340	mm (Nominal value)	≥ 0,5
Castor chair	EN 425	Visual effect after 25 000 cycles	No disturbance to the surface other than slight change in appearance and no delamination shall occur
Simulated movement of a furniture leg	EN 424	Visual effect	No damage shall be visible after testing with a type 2 foot
Residual indentation	EN ISO 24343-1	mm	≤0,25



		Floating		
			HPS 605 x 445 x 10,5mm   23 13/16 x 17 1/2 x 3/8" 905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8" 1220 x 140 x 10,5mm   48 x 5 1/2 x 3/8"	
Safety properties - EN 14041				
Fire resistance	EN 13501-1	Class	C <sub>fl-s1</sub>	
Slip classification	EN 13893	Class	DS	
Formaldehyde emission	EN 717-1	Class	EI	
Electrical behaviour	EN 1815	KV	Not Antistatic	
Content pentachlorophenol (PCP)	EN 14041 (Annex B)	mg/Kg	PCP Free	
Optional properties				
Stains resistance	ISO 26987(a)	Grade (b)	Grade 5	
Thermal resistance	EN 12667	(m²K)/W	R≤ 0,150	
mpact sound reduction	ISO 140-8	dB ( $\Delta$ Lw)	16	
Reduction improvement	EDITATION I CO I I I 404	dB(A)	11.1	
Difference of loudness	EPH/IHD Works Standard 431	%	53.3	
ASTM Standards				
IC Impact insulation class	ASTM E492 / ASTM E989	IIC (dB)	75	
STC classification for rating sound insulation	ASTM E90 /ASTM E413	STC (dB)	66	
gnition characteristics of finished textile floor covering systems	ASTM D2859		met the criteria	
Outlined along the entire relia	ACTN4//2	DS(4,0min)	208,3	
Optical density of smoke	ASTM662	DS(4,0min)	163	
Critical radiant flux	ASTM E648	(W / cm²)	0.68	
Residual indentation	ASTM F1914	(%)	0,2	
Static load resistance	ASTM F1914	(mm)	0,04	
Thermal conductivity		W/(m.K)	0,112	

(m<sup>2</sup>K)/W

0,097

ASTM C 177

Thermal resistance



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



Global GreenTagCertTM is an independent certification and rating scheme for green products, recognized by the Green Building Councils of Australia and New Zealand.

This certification also allows the products to be listed in the Ecospecifier Global eco-products.



- (a) The following products were tested: Aceton, Coffee, NaOH, H<sub>2</sub>O<sub>2</sub>, Shoepolish.
- b) Grade 5 no visible / Grade 4 very minor changes / damages at the surface / Grade 3 - minor changes / damages at the surface / Grade 2 - strong changes / damages at the surface / Grade 1 - surface destruction.

Wicanders Flooring Collection is supported by a warranty. Please, read the warranty terms on **www.wicanders.com** 

# cork Pure

#### **Formats**

450 x 450 x 6mm 17 11/16 x 17 11/16 x 1/4"

600 x 150 x 4mm 23 5/8 x 5 7/8 x 3/16"

600 x 300 x 4mm 23 5/8 x 11 13/16 x 3/16"

600 x 300 x 6mm 23 5/8 x 11 13/16 x 1/4"

600 x 450 x 4mm 23 5/8 x 17 11/16 x 3/16"

900 x 150 x 4mm 35 7/16 x 5 7/8 x 3/16"

900 x 300 x 4mm 35 7/16 x 11 13/16 x 3/16"



	Go	23 111	
IGE	Essence	23 31 31	
RANGE	Resist <sup>+</sup>	23 33 33	
	Pure	23 31 31	



Heavy Traffic Residential areas



Moderate Traffic Commercial areas



Heavy Traffic Commercial areas



S Budget products









#### Class

Design, wellbeing and durability.

If you prefer the glue down solution in your projects, you can equally choose the looks available in the Essence / Resist + range.

Take advantage of the rich and broad range of natural and painted looks and create wellbeing in every room enjoying the exclusive qualities of cork - superior comfort and minimal step sound.

Organic stone visuals in soothing light colours as Slate Arctic grant spaces steeped in serenity. Your eyes perceive a stone tile and your feet feel the thermal balance and pleasant touch of cork.



Slate Moccaccino

600 x 450 x 4mm

Slate Caffe C91A002

600 x 450 x 4mm







Flock Tea c93Z001



Flock Chestnut C94A001 600 x 300 x 4mm



Flock Moonlight










President Chestnut

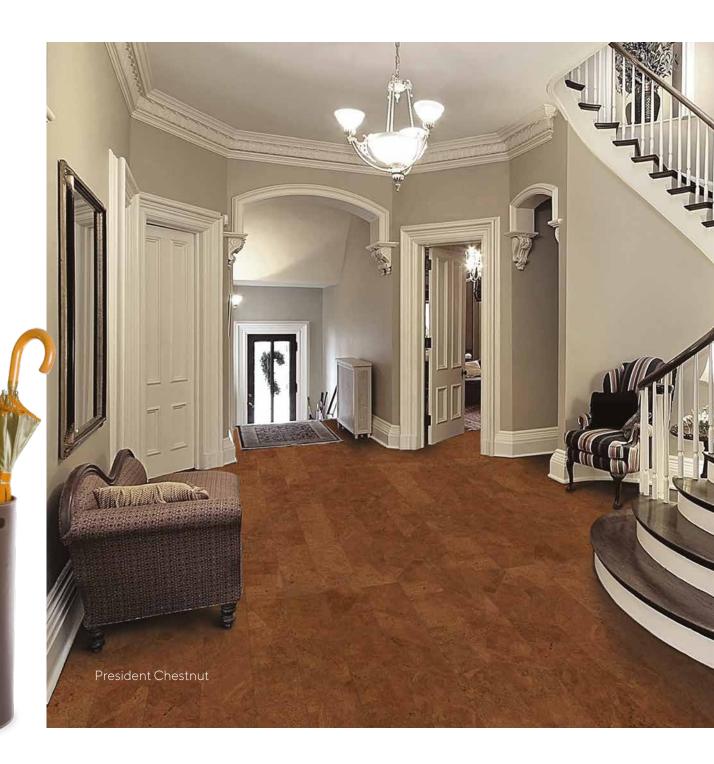







President Spice

900 x 300 x 4mm



President Chocolate



Identity Timide

1902002 600 x 300 x 6mm C92M001 600 x 450 x 4mm



Identity Moonlight

1901002 600 x 300 x 6mm C92N001 600 x 450 x 4mm







Identity Champagne
1905002 600 x 300 x 6mm

C92O001 600 x 450 x 4mm



Identity Eden 1906002 600 x 300 x 6mm



Identity Silver
1903002
600 x 300 x 6mm



Identity Tea

1910002 600 x 300 x 6mm

C92R001 600 x 450 x 4mm



Identity Chestnut

1932002 600 x 300 x 6mm

C93G001 600 x 450 x 4mm



Identity Nightshade

1921002 600 x 300 x 6mm

C92L001 600 x 450 x 4mm



Originals Natural
RV10003
600 x 300 x 4mm



Originals Traditional EN01005 600 x 300 x 6mm RN01008 600 x 300 x 4mm



Originals Rhapsody
DN12003
600 x 300 x 6mm



Originals Country
DN02006

600 x 300 x 6mm



Originals Shell
DN10001 600 x 300 x 6mm
RN14002 600 x 300 x 4mm
RV14004 600 x 300 x 4mm



Originals Dawn
DN13001 600 x 300 x 6mm
RN13001 600 x 300 x 4mm
RV13006 600 x 300 x 4mm



Originals Character
DN22001 600 x 300 x 6mm

DN22001 600 x 300 x 6mm RN16001 600 x 300 x 4mm RV16004 600 x 300 x 4mm



Originals Harmony

DN11003 600 x 300 x 6mm DN11004 600 x 300 x 6mm RN11002 600 x 300 x 4mm RV11007 600 x 300 x 4mm






Originals Symphony

DN20001 600 x 300 x 6mm RN20001 600 x 300 x 4mm



Originals Accent



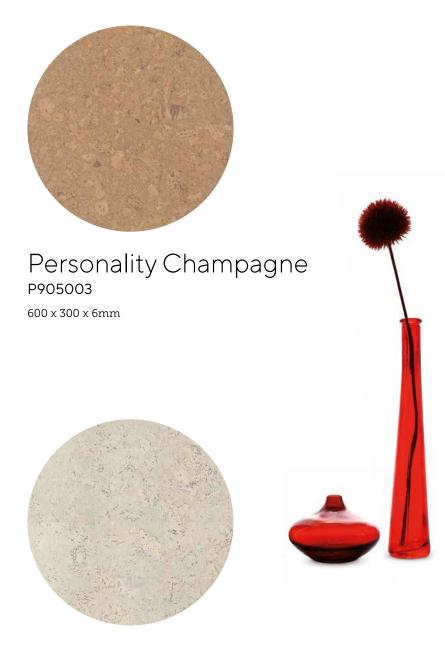

Personality Moonlight P901003









Personality Timide
P902003
600 x 300 x 6mm



Personality Eden P906003 600 x 300 x 6mm



Personality Tea

600 x 300 x 6mm



Personality Spice

600 x 300 x 4mm



Personality Chestnut



#### Fashionable Grafite C95M001

900 x 300 x 4mm



#### Contemporary

# Innovation to use and live your space

If you're looking for out of the mainstream flooring looks, that will astonish all your visitors, here's a set of 32 curated solutions.

For residential or commercial use, you can pick expressive and refreshing reinvented cork patterns that will assure a Contemporary statement to your space. The hard task will be to choose one!

In your living room project, you can perfectly balance the power of these flooring looks with light and day-to-day objects or toys and the result will still be impressive.









Fashionable Glacier c95J001 900 x 300 x 4mm



Fashionable Cement c95L001

900 x 300 x 4mm



Fashionable Macchiato C95N001

900 x 300 x 4mm



Fashionable Mystic c95K001

# Lane Chestnut

#### Contemporary



Lane Timide C93R001

900 x 300 x 4mm



Lane Chestnut





Linn Blush

600 x 450 x 4mm



Linn Moon

600 x 450 x 4mm



Linn Cioccolato

600 x 450 x 4mm







Skin Timide

450 x 450 x 6mm



Skin Natural

450 x 450 x 6mm



Skin Dark c95B001

450 x 450 x 6mm










Reed Meridian

900 x 300 x 4mm



Reed Barley






Traces Moonlight

C95P001 600 x 150 x 4mm

C95P002 900 x 150 x 4mm



Traces Champagne
C950001 600 x 150 x 4mm
C950002 900 x 150 x 4mm



Traces Spice c94N001

600 x 150 x 4mm



Traces Chestnut
C95R001 600 x 150 x 4mm
C95R002 900 x 150 x 4mm



#### Contemporary Meet the Novel 3

industrial designer Antonio Bullo, are also available in the





Novel Brick Flax C96T001

900 x 300 x 4mm



Novel Brick Drill C96S001







Novel Brick Natural c9G1001

900 x 300 x 4mm



Novel Brick Taffeta



Novel Twist Natural c9G0001

900 x 300 x 4mm



Novel Twist Velvet c96Q001

900 x 300 x 4mm



Novel Twist Drill C96P001

900 x 300 x 4mm



Novel Twist Taffeta

C96O001 900 x 300 x 4mm



Novel Edge Natural c9G2001

900 x 300 x 4mm



Novel Edge Lace c96W001

900 x 300 x 4mm



Novel Edge Drill

900 x 300 x 4mm



Novel Edge Burlap



# Technical solution

PROTECTIVE SURFACE

GENUINE CORK VENEER

AGGLOMERATED CORK 3,2MM / 5,2MM





For domestic areas that need a natural look and a soft touch, PU is the right solution.







For those seeking for a customized solution, the Sanded option is what you are looking for. The surface is prepared to be finished on site, so you can select the finish that best suits your needs.



Xtreme WRT surface finish (Wear Resistance Technology) is the right choice to fit the most demanding needs of domestic areas. This environmental friendly varnish is based on a ceramic compound which ensures exceptional strength and longevity.



















<sup>\*\*</sup>Must be varnished on-site with minimum 3-4 coats of W-2000 or another recommended varnish for this level of use (see recommendation table in the packaging).



#### Technical Data Sheet

			Chus danna		
			Glue down		
			WRT 600 x 300 x 4mm   23 5/8 x 11 13/16 x 3/16"	PU 450 x 450 x 6mm   1711/16 x 1711/16 x 1/4" 600 x 150 x 4mm   23 5/8 x 57/8 x 3/16" 600 x 300 x 4mm   23 5/8 x 11 13/16 x 3/16" 600 x 300 x 6mm   23 5/8 x 11 13/16 x 1/4" 600 x 450 x 4mm   23 5/8 x 17 11/16 x 3/16" 900 x 150 x 4mm   357/16 x 57/8 x 3/16" 900 x 300 x 4mm   357/16 x 11 13/16 x 3/16"	Sanded 600 x 300 x 4mm   23 5/8 x 11 13/16 x 3/16" 600 x 300 x 6mm   23 5/8 x 11 13/16 x 1/4"
Level of use Domestic	ISO 10874	Class	23	23	23 (d)
Level of use Commercial	ISO 10874	Class	31	-	31 (e)
Finish Description	-	-	UV-cured Acrylic varnish with ceramic beads	Water based PU varnish	Sanded surface
	Standard-Test Method	Unit	Specification		
General Properties - EN 14085 + EN 12104 + EN 6	555				
Dimensions:	EN ISO 24346	mm	≤ 0,2% up to max. 1,0	≤ 0,2% up to max. 1,0	≤ 0,2% up to max. 1,0
Overall thickness	EN ISO 24346	mm	0; + 0,25	0;+0,25	0; + 0,25
Squareness	EN ISO 24346	mm	-	-	≤ 0,5
Straightness measured at the surface layer	EN ISO 24346	mm	-	-	≤1,0
Squareness and Straightness: ≤ 400mm > 400mm	EN ISO 24346	mm	≤ 0,5 ≤ 1,0	≤0,5 ≤1,0	≤ 0,5 ≤ 1,0
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0,4	≤ 0,4	-
Curling after exposure to heat	EN ISO 23999	mm	≤6	≤6	-
Moisture content	EN 12105	%	3.5-4.5	-	3.5-4.5
Mass per unit area	ISO 23997	g/m²	Nominal Value (2000) ± 10%	4mm: nominal value 1800+ - 10% 6mm: nominal value 2700 + - 10%	-
Apparent density	EN 672	Kg/m³	≥ 95% of Nominal Value (450)	≥ 95% of nominal value (450)	≥ 95% of nominal value (450)
Classification Properties - EN 14085 + EN 12104 -					
Overall thickness	EN ISO 24346	mm	≥ 4,0	≥ 4,0	-
Apparent density	EN 672	Kg/m³	≥450	≥450	-
Castor chair	EN 425	Visual effect after 25 000 cycles	-	No disturbance to the surface other than slight change in appearance and no delamination shall occur	-

			Glue down		
			<b>WRT</b> <b>600 x 300 x 4mm  </b> 23 5/8 x 11 13/16 x 3/16"	PU 450 x 450 x 6mm   1711/16 x 1711/16 x 1/4" 600 x 150 x 4mm   23 5/8 x 57/8 x 3/16" 600 x 300 x 4mm   23 5/8 x 1113/16 x 3/16" 600 x 300 x 6mm   23 5/8 x 1711/16 x 3/16" 600 x 450 x 4mm   23 5/8 x 1711/16 x 3/16" 900 x 150 x 4mm   357/16 x 57/8 x 3/16" 900 x 300 x 4mm   357/16 x 51/8 x 3/16"	Sanded 600 x 300 x 4mm   23 5/8 x 11 13/16 x 3/16" 600 x 300 x 6mm   23 5/8 x 11 13/16 x 1/4"
Simulated movement of a furniture leg	EN 424	Visual effect	-	No damage shall be visible after testing with a type 2 foot	-
Residual indentation	EN ISO 24343-1	mm	≤ 0,40	≤ 0,40	≤ 0,40
Safety properties - EN 14041					
Fire resistance	EN 13501-1	Class	D <sub>fl-s1</sub>	4mm: C <sub>fl-s1</sub> / 6mm: D <sub>fl-s1</sub>	C <sub>fl-s1</sub>
Slip classification	EN 13893	Class	DS	DS	-
Formaldehyde emission	EN 717-1	Class	E1	E1	E1
Electrical behaviour	EN 1815	KV	Not Antistatic	Not antistatic	Not antistatic
Content pentachlorophenol (PCP)	EN 14041 (Annex B)	mg/Kg	PCP Free	PCP Free	PCP Free
Optional properties					
Stains resistance	ISO 26987(b)	Grade (c)	Grade 0	Grade 0 (ammonia grade 3; lodine grade 2)	-
Thermal resistance	EN 12667	(m²K)/W	R≤ 0,150	R≤ 0,150	R≤ 0,150
Impact sound reduction	ISO 140-8	dB ( $\Delta$ Lw)	-	4mm: 13 /6mm: 14	-
Reduction improvement	EDITORIA LOCALISTA	dB(A)	-	4mm: 15,3 / 6mm: 17,2	-
Difference of loudness	EPH/IHD Works Standard 431	%	-	4mm: 65 / 6mm: 69	-

#### **ASTM Standards**

	ASTM 925	0 1 ()			
Stains resistance	ASTM 925	Grade (a)	Grade 0	-	-
	7.0111720	(. )			

- (a) The following products were tested: White vinegar (5% acetic acid), Rubbing alcohol (70% Isopropyl), Mineral Oil, 5% Sulfuric acid, Household bleach, Household Ammonia, Kerosene, Olive Oil, Unleaded gasoline.
- (b) The following products were tested: desinfectant, Cleaning benzine, Ammonia solution, Ethanol, Citric Acid, Iodine.
- (c) Grade 0 Unchanged / Grade 1 Little changed / Grade 2 Moderately changed / Grade 3 - Strong changed.
- (d) Must be varnished on-site with minimum 3 coats of w-2000 or another recommended varnish.
- (e) Must be varnished on-site with minimum 3-4 coats of w-2000 or another recommended varnish for this leve of use (see recommendation table in the packaging).

Wicanders Flooring Collection is supported by a warranty. Please, read the warranty terms on www.wicanders.com



Greenguard Certification helps TÜV-PROFICERT-product Interior the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant and the support of research information in accordance with the international standard ISO 14025.



The goal of the German Cork Association is to assure the quality of cork products. as well as the optimization of manufacturing processes projects.



#### (only for gluedown solution)

Eco Mark is a Japan Environment Association program that promotes environment-friendly lifestyles through wise product choices. This certification analyses criteria for every product category taking into consideration the environment life stage.

# Get the best results with Wicanders accessories




#### Increased comfort and insulation

To reinforce the already amazing insulation properties of cork flooring, Wicanders provides Acousticork, a cork underlay which lets you turn your home into an even cosier space.

Acousticork reduces the walking sound and heat dispersion. Overall, it makes rooms cosier and more peaceful, which is essential in making any house feel like home.

- High durability and long term resilience
- Increases floor thermal insulation
- Natural and sustainable product
- Easy to handle and install

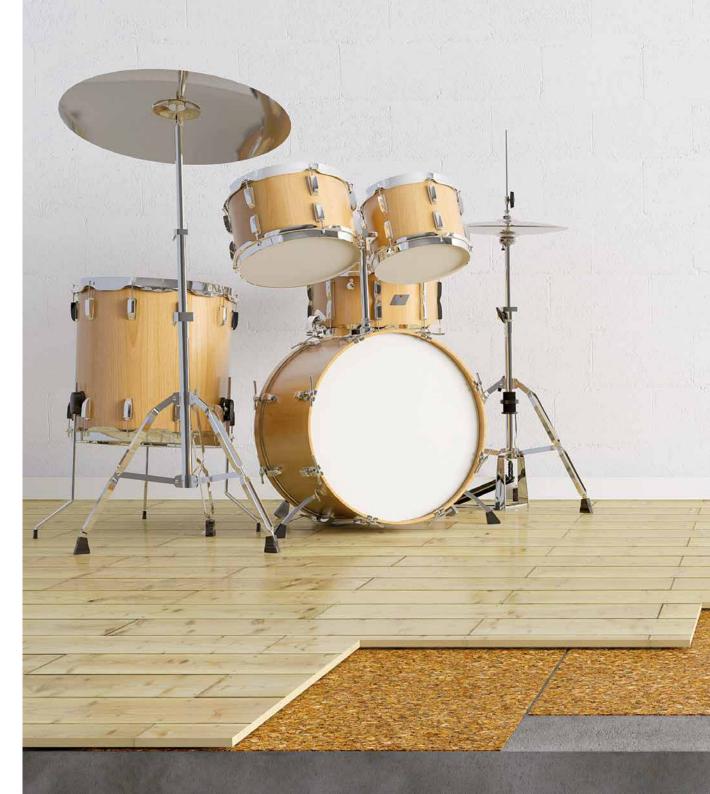



# CREATED BY HUMANS, INSPIRED BY NATURE

Wicanders represents an unique balance between the creation of innovative products and the protection of the environment, combining state-of-the-art technology with the amazing natural properties of cork.



**A green production process** - Cork waste resulting from the industrial process is 100% reincorporated into the production, creating an ecologically virtuous cycle.



**Intensive use of biomass** – The cork powder resulting from the industrial process is burned in order to create biomass which is then used as a major source of energy to supply the production facilities, allowing Wicanders also to base its production in a sustainable source of energy.



**Low carbon emission** – Cork's natural property of retaining CO₂ combined with an eco-sustainable industrial process allows Wicanders to develop eco-efficient products with a low carbon emissions factor, positively contributing to a sustainable environment.



**Indoor Air Quality** - Refined to be free of harmful phthalates Wicanders products have been awarded with worldwide indoor air quality certifications such as Greenquard Gold or A+.



**Negative Global Warming Potential** - The majority of Wicanders products contribute to reduce global warming, since they retain more  $CO_2$  than they emit.



# CORK - A SUSTAINABLE RAW MATERIAL

Cork comes from the bark of the Cork Oak, a slowly growing tree from the Mediterranean basin that may live for 200 years and plays a central role in the social and economic development of this region.



**Truly environmental-friendly** - The extraction of cork and its related industries are remarkably sustainable, since the tree is never cut or damaged during the extraction process and the bark regenerates after each harvest.



**Positive ecological impact** - It is estimated that the Portuguese cork oak forest - Montado - is responsible for retaining 5% of the country's annual  $CO_2$  emission, representing 4.8 million tons per year.




**An activity that crosses generations** - Cork Oaks are manually harvested for the first time when the tree is 25 years old and then every 9 years making it an activity that passes from generation to generation.



A positive economic and social impact – Cork harvesting is a regular and cyclical process that contributes to environmental, economic and social sustainability of the rural areas in the Mediterranean region.



**Rural areas economic engine** - The cork activity as well as related activities fueled by this industry create jobs in many rural areas of the country, encouraging people to settle there.

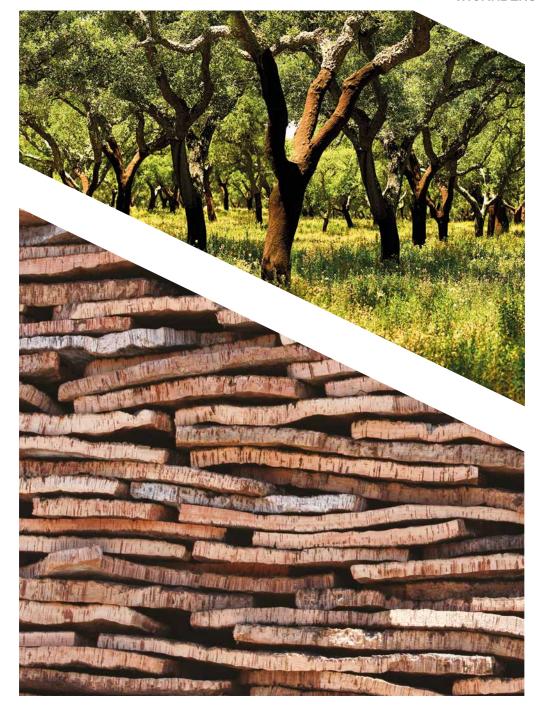

RANGE	Go		Essence		Resist*			Pure		
FINISHING	WPS		WRT		HPS			PU		
CLASS OF USE (ISO 10874)	23 Residential	231	Residential   31 Commer	rcial	23 Residential   33 Commercial			23 Residential		
BEVEL	No Bevel	No E	Bevel	4 Side Bevel		4 Side Micro Bevel		No E	No Bevel	
DIMENSION (mm   inches)	<b>905 x 295 x 10.5</b> 35 5/8 x 11 5/8 x 3/8"	605 x 445 x 10.5 23 13/16 x 17 1/2 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	1220 x 140 x 10.5 48 x 5 1/2 3/8"	605 x 445 x 10.5 23 13/16 x 17 1/2 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	1220 x 140 x 10.5 48 x 5 1/2 3/8"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	900 x 300 x 4 35 7/16 x 11 13/16 x 3/16"	
Allure	GB02002									
Ambition	GB06002									
Appeal	GB10002									
Attraction	GB03002									
Captivation	C824001									
Charm	GB01003									
Desire	GA21003									
Dream	GB05003									
Emotion	GB08002									
Fashionable Cement			C85L001			C15L001			C95L001	
Fashionable Glacier			C85J001			C15J001			C95J001	
Fashionable Grafite			C85M001			C15M001			C95M001	
Fashionable Macchiato			C85N001			C15N001			C95N001	
Fashionable Mystic			C85K001			C15K001			C95K001	
Flock Champagne				C81Y001			C11Y001			
Flock Chestnut				C84A001			C14A001			
Flock Moonlight				C81X001			C11X001			



				Pure				
		Р	U			San	ded	WRT
		23 Res	idential		23 Residential   31 Commercial			rcial
		4 Side Bevel			2 Side Bevel	No E	No Bevel	
450 x 450 x 6 17 11/16 x 17 11/16 x 1/4"	50 x 450 x 6 600 x 150 x 4 600 x 300 x 4 6 x 17 11/16 x 1/4" 23 5/8 x 5 7/8 x 3/16" 23 5/8 x 11 13/16 x 3/		600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	600 x 450 x 4 23 5/8 x 17 11/16 x 3/16"	900 x 150 x 4 35 7/16 x 5 7/8 x 3/16"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"
		C94A001						
		C91X001						

RANGE	Go	Essence		Resist*			Pure		
FINISHING	WPS		WRT		HPS			F	PU
CLASS OF USE (ISO 10874)	23 Residential	23 F	Residential   31 Commer	rcial	23 Residential   33 Commercial			23 Residential	
BEVEL	No Bevel	No E	Bevel	4 Side Bevel		4 Side Micro Bevel		No Bevel	
DIMENSION (mm   inches)	<b>905 x 295 x 10.5</b> 35 5/8 x 11 5/8 x 3/8"	605 x 445 x 10.5 23 13/16 x 17 1/2 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	1220 x 140 x 10.5 48 x 5 1/2 3/8"	605 x 445 x 10.5 23 13/16 x 17 1/2 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	1220 x 140 x 10.5 48 x 5 1/2 3/8"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	900 x 300 x 4 35 7/16 x 11 13/16 x 3/16"
Flock Tea				C83Z001			C13Z001		
Identity Champagne			1805002			C12O001			
Identity Chestnut			1832002			C13G001			
Identity Eden			1806002			C12P001			
Identity Moonlight			1801002			C12N002			
Identity Nightshade			1821002			C12L001			
Identity Silver			1803002			C12Y002			
Identity Tea			1810002			C12R001			
Identity Timide			1802002			C12M001			
Impulse	GB09002								
Intense	GB11002								
Lane Chestnut				C83S001			C13S001		C93S001
Lane Timide				C83R001			C13R001		C93R001
Linn Blush		C81O001			C11O003				
Linn Cioccolato		C81L001			C11L002				
Linn Moon		C81N001			C11N001				
Moment	GA01002								



		Р	U			San	ded	WRT	
		23 Resi	dential			23 Residential   31 Commercial			
	4 Side Bevel				2 Side Bevel	No Bevel		No Bevel	
450 x 450 x 6 17 11/16 x 17 11/16 x 1/4"	600 x 150 x 4 23 5/8 x 5 7/8 x 3/16"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	600 x 450 x 4 23 5/8 x 17 11/16 x 3/16"	900 x 150 x 4 35 7/16 x 5 7/8 x 3/16"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"	
		C93Z001							
			1905002	C92O001					
			1932002	C93G001					
			1906002						
			1901002	C92N001					
			1921002	C92L001					
			1903002						
			1910002	C92R001					
			1902002	C92M001					
				C91O003					
				C91L003					
				C91N003					

RANGE	Go		Essence		Resist+			Pure	
FINISHING	WPS		WRT		HPS			PU	
CLASS OF USE (ISO 10874)	23 Residential	23 Residential   31 Commercial		23 Residential   33 Commercial			23 Residential		
BEVEL	No Bevel	No E	Bevel	4 Side Bevel		4 Side Micro Bevel		No E	Bevel
DIMENSION (mm   inches)	<b>905 x 295 x 10.5</b> 35 5/8 x 11 5/8 x 3/8"	605 x 445 x 10.5 23 13/16 x 17 1/2 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	1220 x 140 x 10.5 48 x 5 1/2 3/8"	605 x 445 x 10.5 23 13/16 x 17 1/2 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	1220 x 140 x 10.5 48 x 5 1/2 3/8"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	900 x 300 x 4 35 7/16 x 11 13/16 x 3/16"
Novel Brick Drill			C86S001			C16S001			C96S001
Novel Brick Flax			C86T001			C16T001			C96T001
Novel Brick Natural			C8G1001			C1G1001			C9G1001
Novel Brick Taffeta			C86R001			C16R001			C96R001
Novel Edge Burlap			C86U001			C16U001			C96U001
Novel Edge Drill			C86V001			C16V001			C96V001
Novel Edge Lace			C86W001			C16W001			C96W001
Novel Edge Natural			C8G2001			C1G2001			C9G2001
Novel Twist Drill			C86P001			C16P001			C96P001
Novel Twist Natural			C8G0001			C1G0001			C9G0001
Novel Twist Taffeta			C86O001			C16O001			C96O001
Novel Twist Velvet			C86Q001			C16Q001			C96Q001
Originals Accent			O841002			C141001			
Originals Character			O822002		C122001				
Originals Country			O832004			C132001			
Originals Dawn			O849003			C149001		DN13001	
Originals Harmony			O821005			C121001		DN11003	



				Pure				
		Р	U			San	ded	WRT
		23 Resi	idential		23 Residential   31 Commercial			rcial
		4 Side Bevel			2 Side Bevel	No Bevel		No Bevel
450 x 450 x 6 17 11/16 x 17 11/16 x 1/4"	600 x 150 x 4 23 5/8 x 5 7/8 x 3/16"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	600 x 450 x 4 23 5/8 x 17 11/16 x 3/16"	900 x 150 x 4 35 7/16 x 5 7/8 x 3/16"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"
						RN17001		
			DN22001			RN16001		RV16004
			DN02006			11110001		111000
						RN13001		RV13006
			DN11004			RN11002		RV11007

RANGE	Go	Essence		Resist+		Pure			
FINISHING	WPS	WRT		HPS			PU		
CLASS OF USE (ISO 10874)	23 Residential	23 Residential   31 Commercial		23 Residential   33 Commercial			23 Residential		
BEVEL	No Bevel	No E	Bevel	4 Side Bevel	4 Side Micro Bevel			No Bevel	
DIMENSION (mm   inches)	<b>905 x 295 x 10.5</b> 35 5/8 x 11 5/8 x 3/8"	605 x 445 x 10.5 23 13/16 x 17 1/2 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	1220 x 140 x 10.5 48 x 5 1/2 3/8"	605 x 445 x 10.5 23 13/16 x 17 1/2 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	1220 x 140 x 10.5 48 x 5 1/2 3/8"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	900 x 300 x 4 35 7/16 x 11 13/16 x 3/16"
Originals Natural			O801007			C111001			
Originals Rhapsody			O825005			C125001			
Originals Shell			O824003			C124001		DN10001	
Originals Symphony			O830003			C130001		DN20001	
Originals Traditional									
Personality Champagne			P805002			C13K001			
Personality Chestnut			P832002			C14X001			
Personality Eden			P806002			C15S001			
Personality Moonlight			P801002			C14H001			
Personality Spice			P808002			C15U001			
Personality Tea			P810002			C15T001			
Personality Timide			P802002			C13J001			
President Chestnut				F832003			C14L001		C94L001
President Chocolate				F831002			C14I001		C94I001
President Spice				F808002			C14K001		C94K001
Reed Barley				C83U001			C13U001		C93U001
Reed Meridian				C83T001			C13T001		C93T001



Pure								
PU							Sanded	
		23 Residential   31 Commercial						
		4 Side Bevel		2 Side Bevel	No Bevel		No Bevel	
450 x 450 x 6 17 11/16 x 17 11/16 x 1/4"	450 x 450 x 6 600 x 150 x 4 600 x 300 x 4 600 x 300 x 6 600 x 450 x 4 17 11/16 x 17 11/1				900 x 150 x 4 35 7/16 x 5 7/8 x 3/16"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"
								RV10003
			DN12003					
						RN14002		RV14004
						RN20001		
						RN01008	EN01005	
			P905003					
		C94X004						
			P906003					
			P901003					
		C95U002						
			P910003					
			P902003					


RANGE	Go	Essence		Resist*			Pure		
FINISHING	WPS	WRT		HPS			PU		
CLASS OF USE (ISO 10874)	23 Residential	23 Residential   31 Commercial		23 Residential   33 Commercial			23 Residential		
BEVEL	No Bevel	No B	No Bevel 4 Side Bevel		4 Side Micro Bevel			No Bevel	
DIMENSION (mm   inches)	<b>905 x 295 x 10.5</b> 35 5/8 x 11 5/8 x 3/8"	605 x 445 x 10.5 23 13/16 x 17 1/2 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	1220 x 140 x 10.5 48 x 5 1/2 3/8"	605 x 445 x 10.5 23 13/16 x 17 1/2 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	1220 x 140 x 10.5 48 x 5 1/2 3/8"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	900 x 300 x 4 35 7/16 x 11 13/16 x 3/16"
Skin Dark									
Skin Natural									
Skin Timide									
Slate Arctic		C81D001			C11D002				
Slate Caffe		C81A001			C11A002				
Slate Moccaccino		C81C001			C11C002				
Traces Champagne				C85O001			C15O001		
Traces Chestnut				C85R001			C15R001		
Traces Moonlight				C85P001			C15P001		
Traces Spice				Q808003			C14N001		
Traces Tea				Q810001			C14M001		
Tweedy SawCut Moon			C86D001						
Tweedy Wood Cocoa			C86F001						
Tweedy Wood Coffe			C86I001						
Tweedy Wood Timide			C86H001						



Pure									
PU							Sanded		
23 Residential							23 Residential   31 Commercial		
		4 Side Bevel		2 Side Bevel	No Bevel		No Bevel		
450 x 450 x 6 17 11/16 x 17 11/16 x 1/4"	600 x 150 x 4 23 5/8 x 5 7/8 x 3/16"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	600 x 450 x 4 23 5/8 x 17 11/16 x 3/16"	900 x 150 x 4 35 7/16 x 5 7/8 x 3/16"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"	600 x 300 x 6 23 5/8 x 11 13/16 x 1/4"	600 x 300 x 4 23 5/8 x 11 13/16 x 3/16"	
C95B001									
C95V001									
C95C001									
				C91D002					
				C91A002					
				C91C002					
	C95O001				C95O002				
	C95R001				C95R002				
	C95P001				C95P002				
	C94N001								
	C94M001								



# Wicanders' range

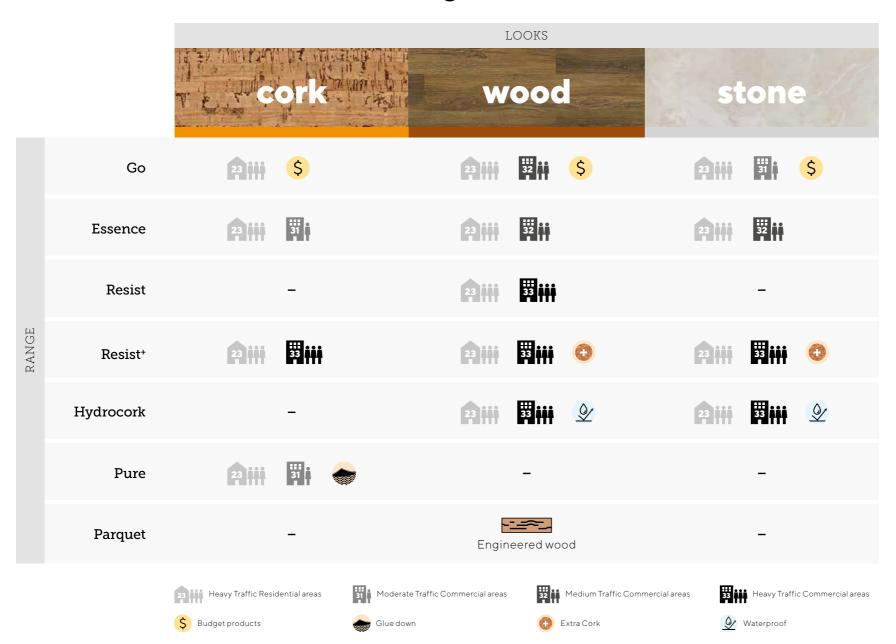



Nature at your feet



#### HeadQuarters

Amorim Revestimentos S.A (+351) 227 475 600 geral.ar@amorim.com

www.wicanders.com

DE	Amorim Deutschland GmbH (+49) 4221 5 93-01	germany.ar.de@amorim.com
BE NE LUX	Amorim Benelux B.V. (+31) 166 604 111	info.ar.nl@amorim.com
AT	Amorim Deutschland GmbH (+43) 1 54 51 65 10	austria.ar.de@amorim.com
CH	Amorim Flooring Switzerland AG (+41) 41726 20 20	info@amorim.ch
PT	Amorim Revestimentos, S.A. (+351) 227 475 600	geral.ar@amorim.com
ES	Amorim Revestimentos, S.A. (+34) 902 307 407	info.ar.es@amorim.com
FR	Amorim Revestimentos, S.A. (+33) 800 914 848	info.ar.fr@amorim.com
DK	Timberman Denmark A/S (+45) 995 252 52	timberman@timberman.dk
PL	Dom Korkowy, Sp. z o.o. (+48) 126 379 639	krakow@domkorkowy.pl
US	Amorim Flooring North America (+1) 410 553 60 62	info.ar.us@amorim.com
RU	Amorim Flooring Rus, OOO (+7) 495 280 7860	info.ar.ru@amorim.com







